


**BY RIDERS
FOR RIDERS**

INSTALL INSTRUCTIONS



**MANUFACTURER
WARRANTY**

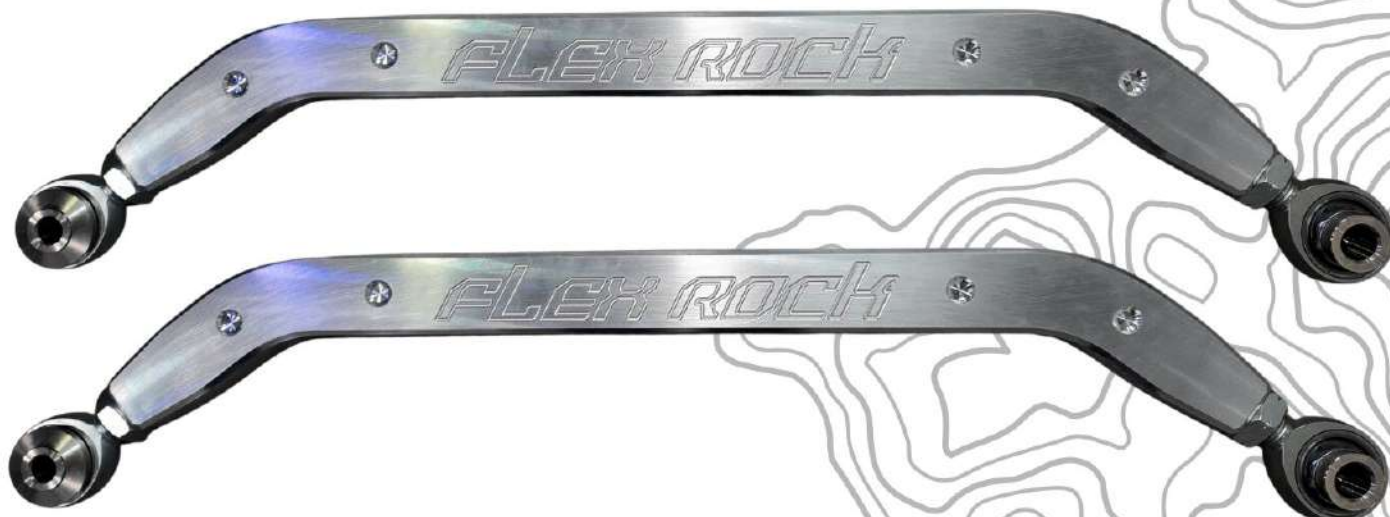

WHO WE ARE—PERFORMANCE AND DESIGN

FLEX ROCK manufactures high performance aftermarket UTV products. We have been developing our products since 2018, and our goal is to combine form and function to result in the highest performing, best looking products available.



ORDERS@FLEXROCKPERFORMANCE.COM

317•427•0010



XP1000/PRO XP/XP S HIGH CLEARANCE/ULTRA HIGH CLEARANCE Lower Radius Rod Kit

RRL-10001,10003,10005,10006,10009,10014,10019,10020-SA

Installation Instructions

Tools Needed:

- Ratchet, Adjustable Wrench, Torque Wrench
- 18mm,19mm, T40 Torx sockets
- 2015-2019 XP1000/XP Turbo -15mm,
18mm,15/16",1-1/8" Wrenches
- 2024-Newer XP1000/Pro XP – 17mm,18mm, 1-1/8"
Wrenches
- Jack/Lift
- 2 Jackstands

1. Chock both front tires and raise the back end of machine using a jack. If using a lift place supports under the machine frame front and rear. Raise the machine to the desired height and then jump to step 3.
2. Place one jack stand under the rear of frame on both sides and lower machine on to the jack stands. Verify that the tires are off the ground.
3. Remove rear tires and wheels. (19mm socket)
4. PRO XP ONLY: Remove muffler cover. (T40 Torx socket)



- 5. Remove Drivers Side Lower radius rod. Keep OEM hardware (18mm wrench/socket)**
- 6. Remove Passenger Side Lower radius rod. Keep OEM hardware. (18mm wrench/socket)**
- 7. Loosen Upper Bolts for the center plate. (18mm wrench/socket)**
- 8. Install Driver Side Lower Radius Rod. Re-use OEM hardware. Do not tighten bolts completely.**
- 9. Install Passenger Side Lower radius rod. Re-use OEM hardware. Do not tighten bolts completely.**
- 10. Tighten all 4 outboard bolts. Torque to 90 ft-lbs**
- 11. Tighten all 4 inboard bolts. Torque to 90 ft-lbs**
- 12. Install rear tires. (19mm socket)**
- 13. Remove jack stands and lower machine to the ground.**
- 14. PRO XP ONLY: Re-install muffler cover.**
- 15. If a camber readjustment is needed, loosen upper jam nuts and adjust upper radius rod accordingly. Re-tighten jam nuts.**

